Rec'd PCT/PTC 02 DEC 2004

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 11 December 2003 (11.12.2003)

PCT

(10) International Publication Number WO 03/102956 A1

(51) International Patent Classification⁷: 16/34, 7/20, G07F 9/10, G11C 16/10

G11C 7/10,

(21) International Application Number: PCT/IB03/01962

(22) International Filing Date: 16 May 2003 (16.05.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 02100664.8

4 June 2002 (04.06.2002) EP

(71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and


(75) Inventors/Applicants (for US only): ARNOLD,

Siegfried [AT/AT]; Triester Strasse 64, A-1101 Vienna (AT). LACKNER, Christian [AT/AT]; Triester Strasse 64, A-1101 Vienna (AT).

- (74) Agent: WEBER, Helmut; Philips Intellectual Property & Standards, Triester Strasse 64, A-1101 Vienna (AT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: ROLL BACK METHOD FOR A SMART CARD

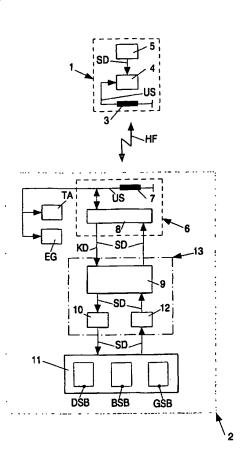

(57) Abstract: In a data carrier (2) for contactless communication of storage data (SD) with a reader station (1), a recovery device (13) is provided, with which, following an unexpected abort of the storing of storage data (SD) in a memory (11) by virtue of a lack of supply voltage, a valid storage state can be restored in memory (11). For this purpose, any storage locations that are only weakly stored in memory (11) will be read, and the read-out storage data (SD) will be re-stored in the memory (11).

WO 03/102956 A1





SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.